




# CURTIS

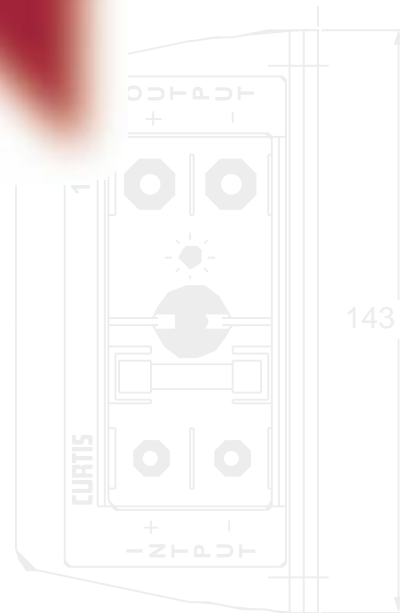

## DC/DC CONVERTERS

### 1400 SERIES

**CURTIS INSTRUMENTS, INC.**  
 200 KISCO AVENUE  
 MT. KISCO, NY 10549  
 USA  
 TEL (914) 666-2971  
 FAX (914) 666-2188

**CURTIS PMC**  
 235 EAST AIRWAY BLVD.  
 LIVERMORE, CA 94550  
 USA  
 TEL (925) 961-1088  
 FAX (925) 961-1099BΣ

**CURTIS INSTRUMENTS, (UK) LTD.**  
 5 UPPER PRIORY STREET  
 NORTHAMPTON NN1 2PT, ENGLAND  
 TEL 44 (0) 1604-629755  
 FAX 44 (0) 1604-629876

**CURTIS INSTRUMENTS INDIA PRIVATE LTD.**  
 DATTAPRASAD • AVANI APARTMENT  
 APT. NO. 7 • 1206 B/7 APTE ROAD,  
 SHIVAJI NAGAR • PUNE 411 004, INDIA  
 TEL 91 (0) 20-5531288  
 FAX 91 (0) 20-5539192

[www.curtisinst.com](http://www.curtisinst.com)



## DESCRIPTION

*The 1400 High Efficiency Series DC/DC Converter applies advanced technology and is configured specifically for electric vehicles. Available in 250W and 375W models, the devices provide a precise regulated output of 12.0 or 24.0 volts for computer terminals and communication equipment. Provides 13.5 or 28.0 volts for driving lamps and charging auxiliary batteries.*

## WARRANTY

Two Year Limited Warranty  
(see terms of sale for specifics)

**Application**

Designed to provide a reduced voltage supply to power auxiliary electrical systems, the Curtis 1400 Series High Efficiency DC/DC Converters achieve unmatched levels of efficiency and safety.

**Features**

- Maximum pulse power exceeds 125% of the nominal rating.
- Simple to install, compact and versatile - can be mounted in any position.
- Safe to use, di-electrically isolated output, thermal protection, transient protection, reverse polarity protection.
- Provides power to auxiliary electrical circuits on an electrical vehicle without recourse to battery tapping which is unsafe, damaging to the battery and may contravene EC regulations.
- Regulated outputs preclude lights from dimming and other effects of voltage drop caused by battery loading.
- Input and output are di-electrically isolated for maximum safety.
- Over 85% efficient with high power density.
- The output is regulated to +/- 1.5%. Model 1400 Series is superior to previously available converters and prevents battery damage and unsafe installations caused by battery tappings.
- Due to superior efficiency less heat is generated which, together with transient protection, leads to improved reliability.
- Smaller, lighter and significantly more quiet than conventional converters.

**Options Available**

- Available in both 250 Watt peak and 375 Watt peak models.
- Range of models to cover 24 to 144 volt input with 12.0, 13.5, 24.0 or 28.0 volt output.

## Specifications

	1400 E	1410 E
Maximum Peak Power	375W	250W
Nominal Power Rating	300W	200W
Isolated	Yes	Yes
Frequency	60KHz	60KHz
Input Voltages available	24/36; 48/60; 72/96; 120/140	36/48; 72/96
Output Voltage	12V; 13.5V; 24V; 28V	12V; 13.5V; 24V; 28V
Current Limit @ 12V	30A	20A
Nominal Current Output (1 hr. rating)	25A	15A
Current Limit @ 24V	15A	10A
Nominal Current Output (1 hr. rating)	12.5A	7.5A
Output Voltage Regulation	+/- 1.5%	+/- 1.5%
Output voltage ripple	<1%	<2.5%
Input voltage	65% to 115% of nominal	65% to 115% of nominal
Output short circuit protection	Yes	Yes
Input Reverse polarity protection	Yes	Yes
Efficiency	>85%	>85%
Weight	1.6 kg (3.52 lb)	2.1 kg (4.6 lb)
Size	176mm x 143mm x 74mm	176mm x 143mm x 74mm
Input/Output	Di-electrically isolated conforms to EEC 86/663 and UL 583 Standards	
Input Transient Protection	+/- 500V at 500Hz	+/- 500V at 500Hz
Di-electric Isolation	1000 volts, at 60Hz sinusoidal for 1 minute	
Thermal Protection	Thermal switch cuts off at +80°C and resets at +60°C (internal temperature)	
Ambient Operating Temp. Range	-30°C to +55°C	-30°C to +55°C
Storage Temp. Range	-40° to +100°C	-40° to +100°C
Environment Protection	Case: IP65 (terminations IP20)	Case: IP65
Shock and Vibration	SAE J1378, March 1983	
EMC Specifications	EN50081-1 for emission / EN50082-2 for immunity	

## Model Encodement

1400E/1410E - vvvv - model suffix  
 Model # input voltage

## Available Models

Model	1400E		1410E	
	OUTPUT VOLTAGE	OUTPUT CURRENT LIMIT	OUTPUT VOLTAGE	OUTPUT CURRENT LIMIT
1201	13.5VDC	28.0A	13.5VDC	14.3A
1203	12.0VDC	28.0A	12.0VDC	16.7A
1211	13.5VDC	22.0A	-	-
1212	14.0VDC	22.0A	-	-
2401	28.0VDC	10.7A	28.0VDC	7.1A
2403	24.0VDC	10.7A	24.0VDC	8.4A

## Dimensions - mm (inches)

