

# CRANE WITH WINCH



## SUSPENDED LOADS HANDLING Solutions

### ADVANTAGES

- Handling solution for suspended loads for all type of building sites.
- Turn your telehandler into a crane.
- Perfect for transporting and placing beams, frames and other suspended loads.
- Its winch allows to gain greater flexibility while keeping an important forward reach.
- Tubular structure designed for an optimal weight/rigidity ratio.

### TECHNICAL CHARACTERISTICS

- Wide range of crane with winch from 600 kg to 2000kg with a forward reach max. from 4 m to 2.5 m.
- Oil immersed negative brakes.
- Safety: homologated swil self locking hook.
- Limit switch sensor (up and down).

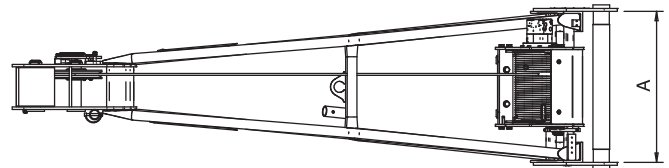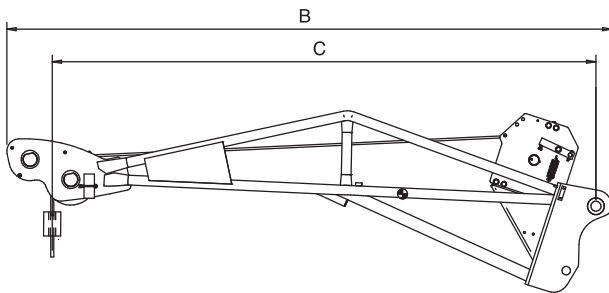

	Capacity (kg)	A	B	Pulling	Total Cable length (m)	Hook Speed (m/min)	Weight (kg)
<b>PT 600</b>	600	830	3830	Direct line	40	89	278
<b>PT 1000</b>	1000	830	3830	Double line	56	44	299
<b>PT 1500</b>	1500	830	3008	Direct line	37	48	324
<b>PT 2000</b>	2000	830	2517	Double line	49	24	354

### COMPTAIBILITY\*

	PT 600	PT 1000	PT 1500	PT 2000
<b>Part Number MT</b>	708538	N/A	N/A	N/A
<b>MT 625</b>				
<b>MT 732</b>	X			
<b>MT 835</b>	X			
<b>MT 1030</b>	X			
<b>MT 1135</b>	X			
<b>MT 1235</b>	X			
<b>MT 1335</b>	X			
<b>MT 1440</b>	X			
<b>MT 1740</b>	X			
<b>MT 1840</b>	X			
<b>Part Number MRT</b>	711936	711938	885264	885265
<b>MRT EASY (€ 3A)</b>	X	X	X	X
<b>MRT PRIV</b>	X	X	X	X
<b>Part Number MRT+</b>	921325	921326	921330	921331
<b>MRT EASY (€ 3B)</b>	X	X	X	X
<b>MRT + PRIV</b>	X	X	X	X

\* This Attachment has been approved for the MT and MRT listed above. A load chart Machine/Attachment has been created accordingly.

This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document.

Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes

PT\_EN\_A\_0413



www.manitou.com